




Trimble R750

GNSS RECEIVER

KEY FEATURES

- ▶ Trimble® Maxwell™ 7 GNSS ASIC
- ▶ Advanced satellite tracking with Trimble 360 receiver technology
- ▶ Trimble ProPoint™ GNSS positioning engine. Engineered for improved accuracy and productivity in challenging GNSS conditions
- ▶ Convenient front panel display and configuration
- ▶ Wi-Fi and 4G LTE connectivity
- ▶ Bluetooth®, Ethernet, serial and USB support
- ▶ 8 GB internal memory
- ▶ Data logging internally and to external drive
- ▶ USB-C PD charging
- ▶ Support for RTK level precision Trimble CenterPoint® RTX corrections technology
- ▶ Trimble xFill® correction outage technology

Learn more:
geospatial.trimble.com/trimble-r750

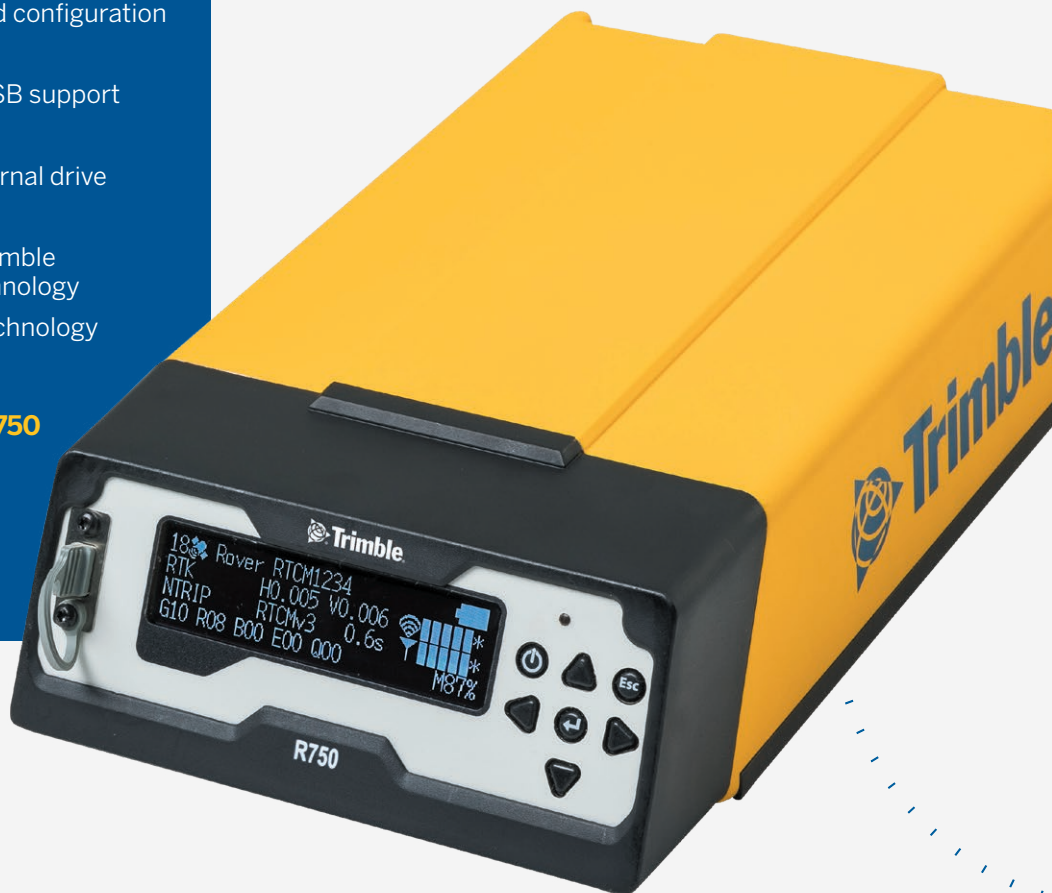

PERFORMANCE SPECIFICATIONS

GNSS MEASUREMENTS

Advanced Trimble Maxwell 7 Custom GNSS Chips with 336 channels
 Trimble EVEREST™ Plus multipath signal rejection
 Constellation agnostic, flexible signal tracking and improved positioning¹ in challenging GNSS environments with Trimble ProPoint GNSS technology
 High-precision multiple correlator for GNSS pseudorange measurements
 Unfiltered, unsmoothed pseudo-range measurements data for low noise, low multipath error, low time domain correlation, and high-dynamic response
 Very low noise carrier phase measurements with <1 mm precision in a 1 Hz bandwidth
 MSS Band (2-channels): Trimble CenterPoint RTX correction service and OmniSTAR® by subscription
 Reduced downtime due to loss of cellular connectivity with Trimble xFill technology
 Signals tracked simultaneously

GPS: L1C/A, L1C, L2C, L2E, L5
 GLONASS: L1C/A, L1P, L2C/A, L2P, L3
 SBAS (WAAS, EGNOS, GAGAN, MSAS): L1C/A, L5
 Galileo: E1, E5A, E5B, E5 AltBOC, E6²
 BeiDou: B1, B1C, B2, B2A, B2B, B3
 QZSS: L1C/A, L1S, L1C, L2C, L5, L6
 NavIC (IRNSS): L5
 L-band: CenterPoint RTX

Positioning rates: 1 Hz, 2 Hz, 5 Hz, 10 Hz, 20 Hz, 50 Hz

POSITIONING PERFORMANCE³

STATIC GNSS SURVEYING

High-Precision Static

| | |
|------------|----------------------|
| Horizontal | 3 mm + 0.1 ppm RMS |
| Vertical | 3.5 mm + 0.4 ppm RMS |

Static and Fast Static

| | |
|------------|--------------------|
| Horizontal | 3 mm + 0.5 ppm RMS |
| Vertical | 5 mm + 0.5 ppm RMS |

REAL TIME KINEMATIC SURVEYING

Single Baseline <30 km

| | |
|------------|-------------------|
| Horizontal | 8 mm + 1 ppm RMS |
| Vertical | 15 mm + 1 ppm RMS |

Network RTK⁴

| | |
|------------|---------------------|
| Horizontal | 8 mm + 0.5 ppm RMS |
| Vertical | 15 mm + 0.5 ppm RMS |

RTK start-up time for specified precisions⁵

2 to 8 seconds

TRIMBLE RTX CORRECTION SERVICES

CenterPoint RTX⁶

| | |
|---|--------------------|
| Horizontal | 2 cm (0.06 ft) RMS |
| Vertical | 5 cm (0.16 ft) RMS |
| RTX convergence time for specified precisions in Trimble RTX Fast regions | < 1 min |
| RTX convergence time for specified precisions in non RTX Fast regions | < 3 min |

TRIMBLE xFILL⁷

| | |
|------------|--|
| Horizontal | RTK ⁸ + 10 mm (0.03 ft)/min RMS |
| Vertical | RTK ⁸ + 20 mm (0.06 ft)/min RMS |

TRIMBLE xFILL PREMIUM⁷

| | |
|------------|----------|
| Horizontal | 3 cm RMS |
| Vertical | 7 cm RMS |

CODE DIFFERENTIAL GNSS POSITIONING

| | |
|-------------------|----------------------|
| Horizontal | 0.25 m + 1 ppm RMS |
| Vertical | 0.50 m + 1 ppm RMS |
| SBAS ⁹ | typically <5 m 3DRMS |

Trimble R750 GNSS RECEIVER

HARDWARE

PHYSICAL

| | | |
|---------------------------|--|--|
| Keyboard and display | | |
| | Display 32 characters by 4 rows | |
| | On/Off key for one-button startup | |
| | Escape and Enter keys for menu navigation | |
| | 4 arrow keys (up, down, left, right) for option scrolls and data entry | |
| Dimensions (L x W x D) | 269 mm (10.6 in) x 141 mm (5.5 in) x 61 mm (2.4 in) | |
| Weight | 2.05 kg (4.52 lb) | |
| Temperature ¹⁰ | | |
| | Operating | -40 °C to +65 °C (-40 °F to +149 °F) |
| | Storage | -40 °C to +80 °C (-40 °F to +176 °F) |
| Humidity | 93% humidity at 40 °C for a duration of 3 hours (IEC-60945 Method 8.3) | |
| Ingress Protection | IP67 for temporary submersion to depth of 1 m (3.3 ft), dustproof | |
| Shock and vibration | | |
| | Pole drop | Designed to survive a 1.1 m (3.6 ft) pole drop onto a hard surface |
| | Shock - Non-operating | To 75 g, 6 ms |
| | Shock - Operating | To 40 g, 10 ms, saw-tooth |
| | | IEC 60945 Method 8.7 |
| | Vibration | Random 6.2 g RMS operating |
| | | 9.8 g RMS 24-2000 Hz for 1 hrs each axis survival |

ELECTRICAL

| | | |
|------------------------------------|---|--|
| Internal | | |
| | Integrated internal battery 7.26 V, 6700 mAh, Lithium-ion | |
| | Internal battery operates as a UPS during an ext power source failure | |
| | Internal battery will charge from external power source as long as source can support the power drain and is more than 12.5 VDC | |
| | Integrated charging circuitry | |
| External | | |
| | Power input on 7-pin 0-shell Lemo connector is optimized for lead acid batteries with a cut-off threshold of 11.5 V, Maximum 28 VDC | |
| | Power input on the 26-pin D-sub connector has a cut-off threshold of 10.5 V | |
| | Power source supply (Internal/External) is hot-swap capable in the event of power source removal or cut off | |
| | DC external power input with over-voltage protection | |
| | Receiver automatically turns on when connected to external power | |
| Power consumption | | |
| | 5.7 W in rover mode with internal LTE modem | |
| | 6.1 W in base mode with internal LTE modem | |
| Operation time on internal battery | | |
| Rover | 8.5 hours cellular receive (Internal or Controller via Bluetooth) | |
| Base station | 7.4 hours cellular transmit | |

CERTIFICATIONS¹¹

| | |
|----------------|---|
| Safety | IEC 62368-1, IEC 60950-1, IEC 62311, IEEE C95.3, UN 38.3, UL 2054 |
| FCC | Part 15 Subpart B (Class B device), subpart C Section 15.2.47, Part 90, Part 22/24/27, part 2, KDB 447498 D01 |
| Canada | ICES-003 (Class B). RSS-GEN, RS-102, RSS-247, RSS-130/132/133/139/199. |
| EU | RED 2014/53/EU, EN 300 113, EN 300 328, EN 301 908, EN 303 413, EN IEC 62368-1, RoHS Directive 2011/65/EU, WEEE Directive 2012/19/EU. |
| UKCA | S.I. 2017 No. 1206, S.I. 2016 No. 1091, S.I. 2016 No. 1101. |
| ACMA | AS/NZS 4268, AS/NZS CISPR 32 |
| Communications | PTCRB, Bluetooth SIG |

COMMUNICATIONS AND DATA STORAGE

| | | |
|-------------------------------|--|---|
| Serial 1 (COM1) | 7-pin 0S Lemo, Serial 1, 3-wire RS-232 | |
| Serial 2 (COM2) | 26-pin D-sub, Serial 2, 5-wire RS232, using adaptor cable (Selectable) | |
| | 26-pin D-sub, Serial 2, 4-wire RS422, using adaptor cable (Selectable) | |
| Serial 3 (COM3) | 26-pin D-sub, Serial 3, 3-wire RS232, using adaptor cable (Selectable) | |
| Serial 4 (COM4) | 26-pin D-sub, Serial 4, 4-wire RS422, using adaptor cable (Selectable) | |
| 1PPS (1 Pulse-per-second) | Supported on both Lemo and 26-pin D-sub | |
| Event In | Supported on Lemo | |
| USB | USB v2.0 (Supports USB-PD charging) | |
| Ethernet | Through a multi-port adaptor | |
| Wi-Fi | Fully-integrated, fully-sealed 2.4/5 GHz Wi-Fi module | Simultaneous Access Point (AP) and Client modes |
| Bluetooth wireless technology | Fully-integrated, fully-sealed 2.4 GHz Bluetooth module ⁶ | |
| Cellular ¹² | Fully-integrated, fully-sealed LTE compliant module | Bands 1:2:3:4:5:7:8:12:18:19:20:28 |

NETWORK PROTOCOLS

| | | |
|-----------------------------|---|--|
| HTTP (web browser GUI) | HTTP, HTTPS | |
| NTP Server | Yes | |
| TCP/IP or UDP | Yes | |
| NTRIP | NTRIP v1 and v2, Client Server and Caster modes | |
| mDNS/uPnP Service discovery | Yes | |
| Dynamic DNS | Yes | |
| eMail alerts | Yes | |

CELLULAR SUPPORT

| | | |
|---|--|--|
| Internet-based correction streams: (IBSS, VRS, NTRIP) | Internal LTE modem Connected smartphone Connected Trimble Controller [Trimble Access™] | |
| Remote access | Using DynDNS and appropriate service | |

SUPPORTED DATA FORMATS

| | | |
|--------------------|-----------------------------------|--|
| Correction inputs | CMRx, CMR+, CMR, RTCM 2.x, RTCM 3 | |
| Correction outputs | RTCM 2.x, CMR, CMR+, CMRx, RTCM 3 | |
| Data outputs | NMEA 0183, GSOFF, 1PPS Time Tags | |

- Challenging GNSS environments are locations where the receiver has sufficient satellite availability to achieve minimum accuracy requirements, but where the signal may be partly obstructed by and/or reflected off of trees, buildings, and other objects. Actual results may vary based on user's geographic location and atmospheric activity.
- The current capability in the receivers is based on publicly available information. As such, Trimble cannot guarantee that these receivers will be fully compatible with a future generation of Galileo satellites or signals.
- Precision and reliability may be subject to anomalies due to multipath, obstructions, satellite geometry, and atmospheric conditions. The specifications stated recommend the use of stable mounts in an open sky view, EMI and multipath clean environment, optimal GNSS constellation configurations, along with the use of survey practices that are generally accepted for performing the highest-order surveys for the applicable application including occupation times appropriate for baseline length. Baselines longer than 30 km require precise ephemeris and occupations up to 24 hours may be required to achieve the high precision static specification.
- Networked RTK PPM values are referenced to the closest physical base station
- May be affected by atmospheric conditions, signal multipath, obstructions and satellite geometry. Initialization reliability is continuously monitored to ensure highest quality.
- RMS performance based on repeatable in field measurements. Achievable accuracy and initialization time may vary based on type and capability of receiver and antenna, user's geographic location and atmospheric activity, scintillation levels, GNSS constellation health and availability and level of multipath including obstructions such as large trees and buildings. Average initialization times when using GPS, GLONASS, Galileo, and BeiDou.
- Accuracies are dependent on GNSS satellite availability. xFill positioning without an xFill Premium subscription ends after 5 minutes of radio downtime. xFill Premium will continue beyond 5 minutes providing the solution has converged, with typical precisions not exceeding 3 cm horizontal, 7 cm vertical. xFill is not available in all regions, check with your local sales representative for more information.
- RTK refers to the last reported precision before the correction source was lost and xFill started.
- Depends on SBAS system performance.
- Operating up to +65 °C ambient when the device is powered by external DC supply and the battery is fully charged or is not being charged.
- Operating up to +30 °C ambient when the battery is being charged by an external DC supply
- Operating up to +48 °C ambient when the device is powered by a USB-PD battery or charger.
- More certification is available upon request.
- Verizon is not a supported network in USA.

Specifications subject to change without notice.



Contact your local Trimble Authorized Distribution Partner for more information

NORTH AMERICA
Trimble Inc.
10368 Westmoor Dr
Westminster CO 80021
USA

EUROPE
Trimble Germany GmbH
Am Prime Parc 11
65479 Raunheim
GERMANY

ASIA-PACIFIC
Trimble Navigation
Singapore PTE Limited
3 HarbourFront Place
#13-02 HarbourFront Tower Two
Singapore 099254
SINGAPORE

